


Radien / Abstände

Vorderkante Kabelführung bis Hinterkante Haltestangen	Hinterkante Turm bis Hinterkante Haltestangen	Hinterkante Haltestangen bis Hinterkante Ballast
4820 mm	3480 mm	600 mm



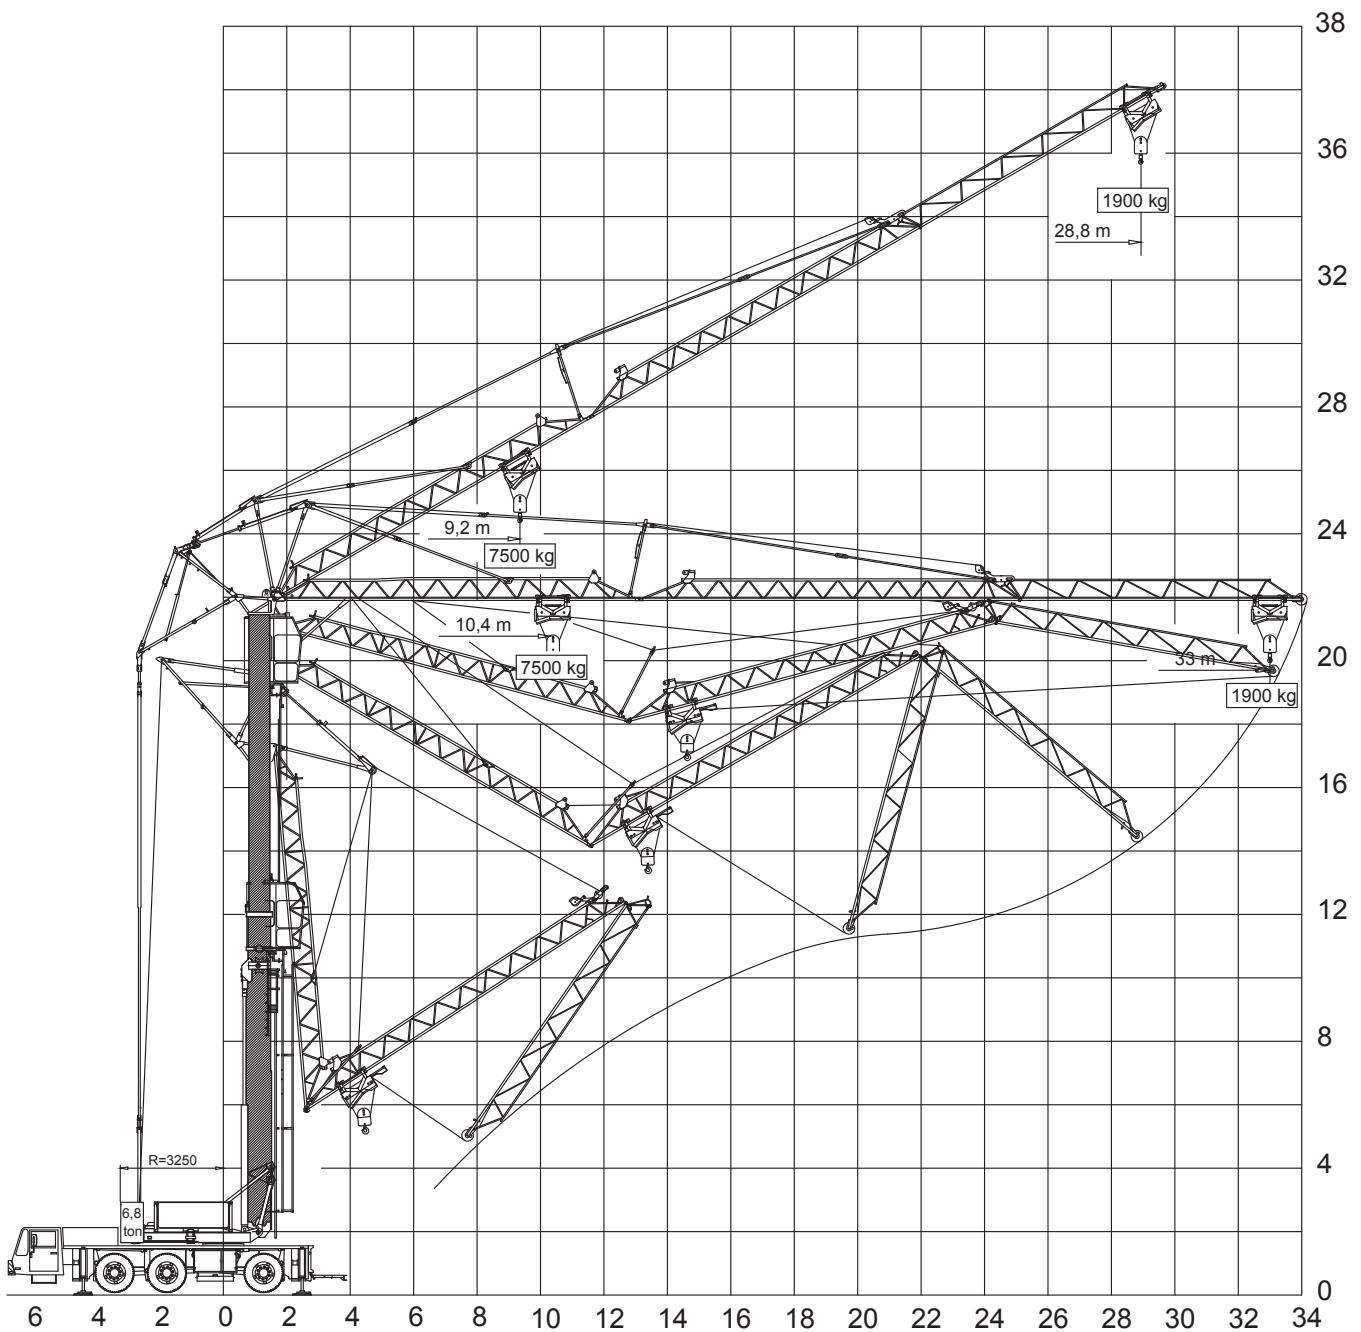

33m



6,8t



6,9x6,4m



360°



75%

m	33		m
	0°	30°	
3,5	7,5	7,5	3,5
9	7,5	7,5	9
10	7,5	6,806	10
11	7,03	6,05	11
12	6,325	5,44	12
13	5,745	4,935	13
14	5,26	4,515	14
15	4,845	4,155	15
16	4,49	3,845	16
17	4,175	3,58	17
18	3,905	3,34	18
19	3,665	3,135	19
20	3,45	2,945	20
21	3,255	2,78	21
22	3,08	2,63	22
23	2,925	2,495	23
24	2,78	2,37	24
25	2,65	2,255	25
26	2,53	2,15	26
27	2,42	2,055	27
28	2,315	1,965	28
28,8	2,22	1,9	28,8
30	2,13		30
31	2,05		31
32	1,975		32
33	1,9		33